

New Creation Technology Rich In Fine Products

新创技术 盛产精品

BALL VALVE SERIES 球阀系列



结构特点Structure characteristics

浮动软密封不锈钢球阀用于PN16~PN63的各种管路上，用于截断或接通管路中的介质，选用不同的材质，可分别适用于水、蒸汽、油品、液化气、天然气、煤气、醋酸、氧化性介质、尿素等多种介质。

- a、在各种阀门中，球阀的流动阻力最小，全径球阀打开时，球体通道、阀体通道和连接管径相等并成一直径，介质几乎可以毫无损失的流过。
 b、球阀旋转90°即可全开全关，启闭迅速。与相同规格的闸阀、截止阀比较，球阀体积小、重量轻、便于管道安装。

Soft floating seal stainless steel ball valve used for PN16 ~ PN63 various piping, used to truncate or on line in the medium, choose no material, can be respectively suitable for water, steam, oil, liquefied petroleum gas, natural gas, coal gas, acetic acid, oxidizing medium, urea, and other media.

A, in all kinds of valve, ball valve flow resistance of the smallest, full bore ball valve is opened, the sphere channels, the body and connected to equal diameter and diameter, flow medium can be almost no losses.

B, ball valve can be rotated 90° seated fully open, opening and closing fast. Compared with the same specifications of the gate valve, globe valve, ball valve, small volume, light weight, easy to pipeline installation.

标准与规范 Standards and norms

设计标准 Design standard	结构长度 Face to Face	法兰连接尺寸 Flange End	试验与检验 Test & Check	压力-温度 Pressure-Temp.
GB/T 12237 API6D	GB/T 12221	JB/T 79 HG20592	JB/T 9092 GB/T 13927	GB/T 12224 ASME B16.34


性能参数performance parameters

序号 NO.	项目名称 Project name	项目名称 Project name			
		PN16	PN25	PN40	PN64
1	公称压力 (MPa)	1.6	2.5	4.0	6.4
2	壳体强度试验压力 (MPa) Shell strength test pressure	常温下公称压力的1.5倍 1.5 Times the nominal pressure at room temperature			
3	高压密封试验压力 (MPa) High pressure seal test pressure	常温下公称压力的1.1倍 1.1 Times the nominal pressure at room temperature			
4	常温下工作压力 (MPa) Operating pressure at room temperature	≤1.6	≤2.5	≤4.0	≤6.4

主要零件材料 Materials for Main Parts

名称 Name	材料 Material								
阀体/阀盖 Body/Bonnet	CF8	CF3	CF8M	CF3M	WCB	LCB	WC6	WC9	C5
球体 Ball	CF8	CF3	CF8M	CF3M	WCB Hcr	CF8	CF8	CF8	CF8
阀杆 Stem	F304	F304L	F316	F316L	2CR13	F304	F304	F304	F304
阀座 Seat	PTFE/PPL/304								
填料/垫片 Packing/Gasket	PTFF					石墨 Graphite			
螺栓 Bolt	不锈钢 Stainless Steel					35CrMoA			
螺母 Nut	不锈钢 Stainless Steel					45、35CrMoA			
手柄 Handle	铸钢 Cast Steel								

Q41/641/941F-16C/P/R/RL

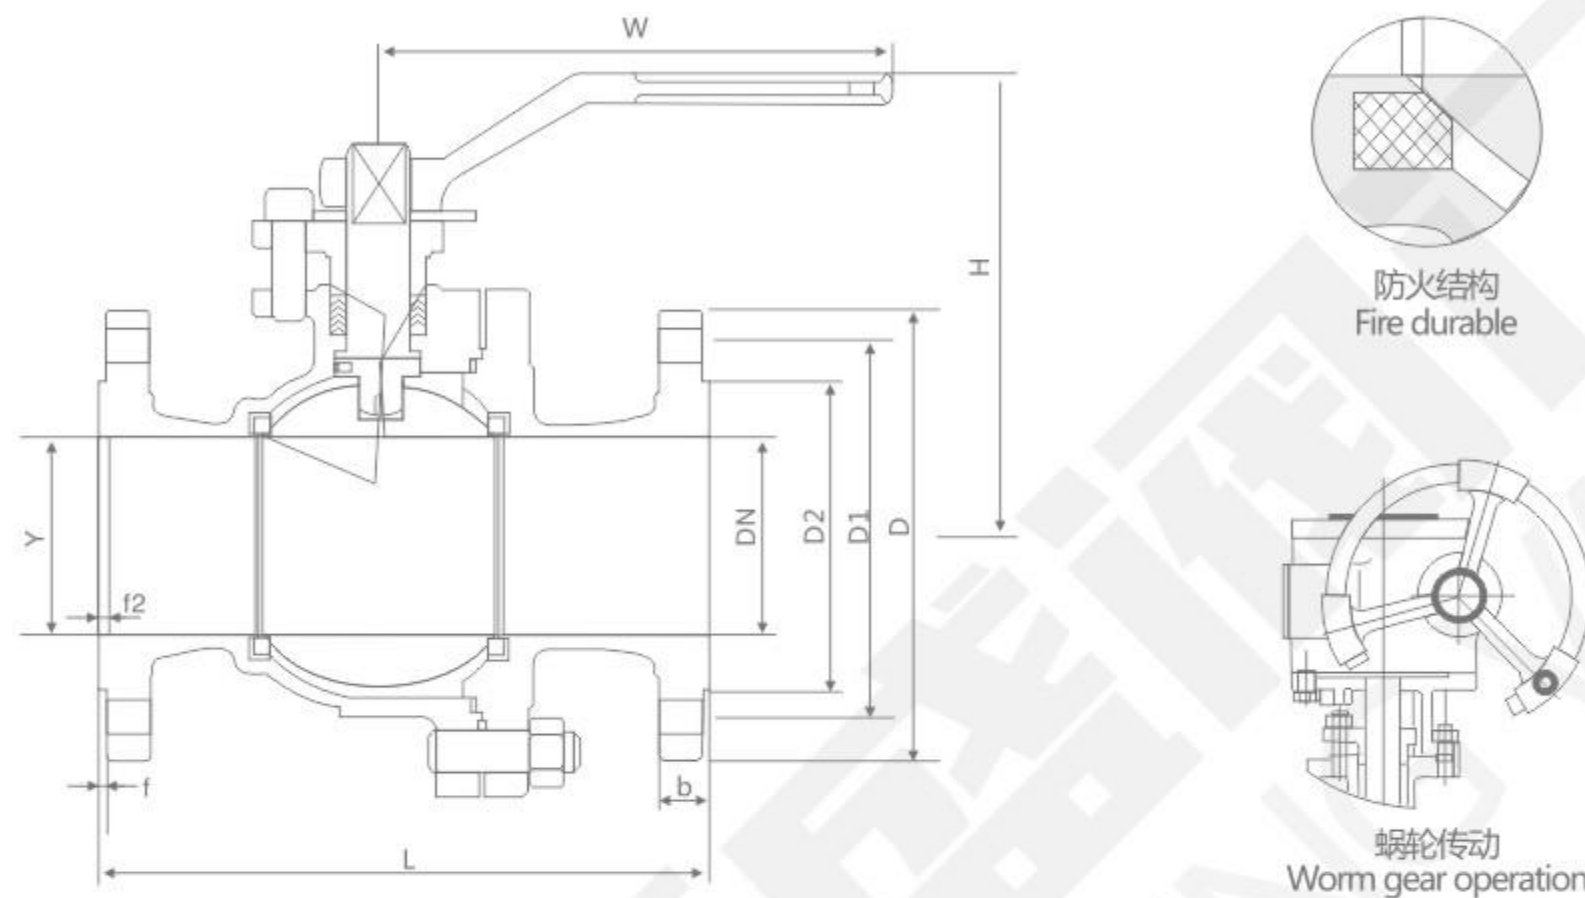

主要外形和连接尺寸 Main external and connection dimension

单位Unit:mm

公称通径 DN	主要外形和连接尺寸Main external and connecting dimensions									WT (kg)
	L	D	D1	D2	b	f	Z-φd	H	W	
	Q41F-16C	Q41F-16P	Q641F-16C	Q641F-16P	Q9B41F-16C	Q9B41F-16P				
15	130	95	65	45	14	2	4-Φ14	78	140	3
20	140	105	75	55	14	2	4-Φ14	84	160	4
25	150	115	85	65	14	2	4-Φ14	95	180	5
32	165	135	100	78	17	2	4-Φ18	150	250	9
40	180	145	110	85	17	2	4-Φ18	150	300	11
50	200	160	125	100	18	2	4-Φ18	170	350	15
65	220	180	145	120	19	2	4-Φ18	195	350	19
80	250	195	160	135	20	2	8-Φ18	215	400	27
100	280	215	180	155	21	2	8-Φ18	250	500	38
125	320	245	210	185	22	3	8-Φ18	265	600	58
150	360	280	240	210	24	3	8-Φ23	270	800	81
200	400	335	295	265	26	3	12-Φ23	330	800	95
250	533	405	355	320	28	3	12-Φ25	450	1300	140